

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: office@stivuitoare-lize.ro

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania

**Pompa hidraulica stivuator Linde H30-35-40 SN:
0009812132 (1546)**

1546

7L 8H
66E

15270





309
HR 17

15270






FOX RACING

FOX-028-016


FB-10-S-08

99-2-22

1530R

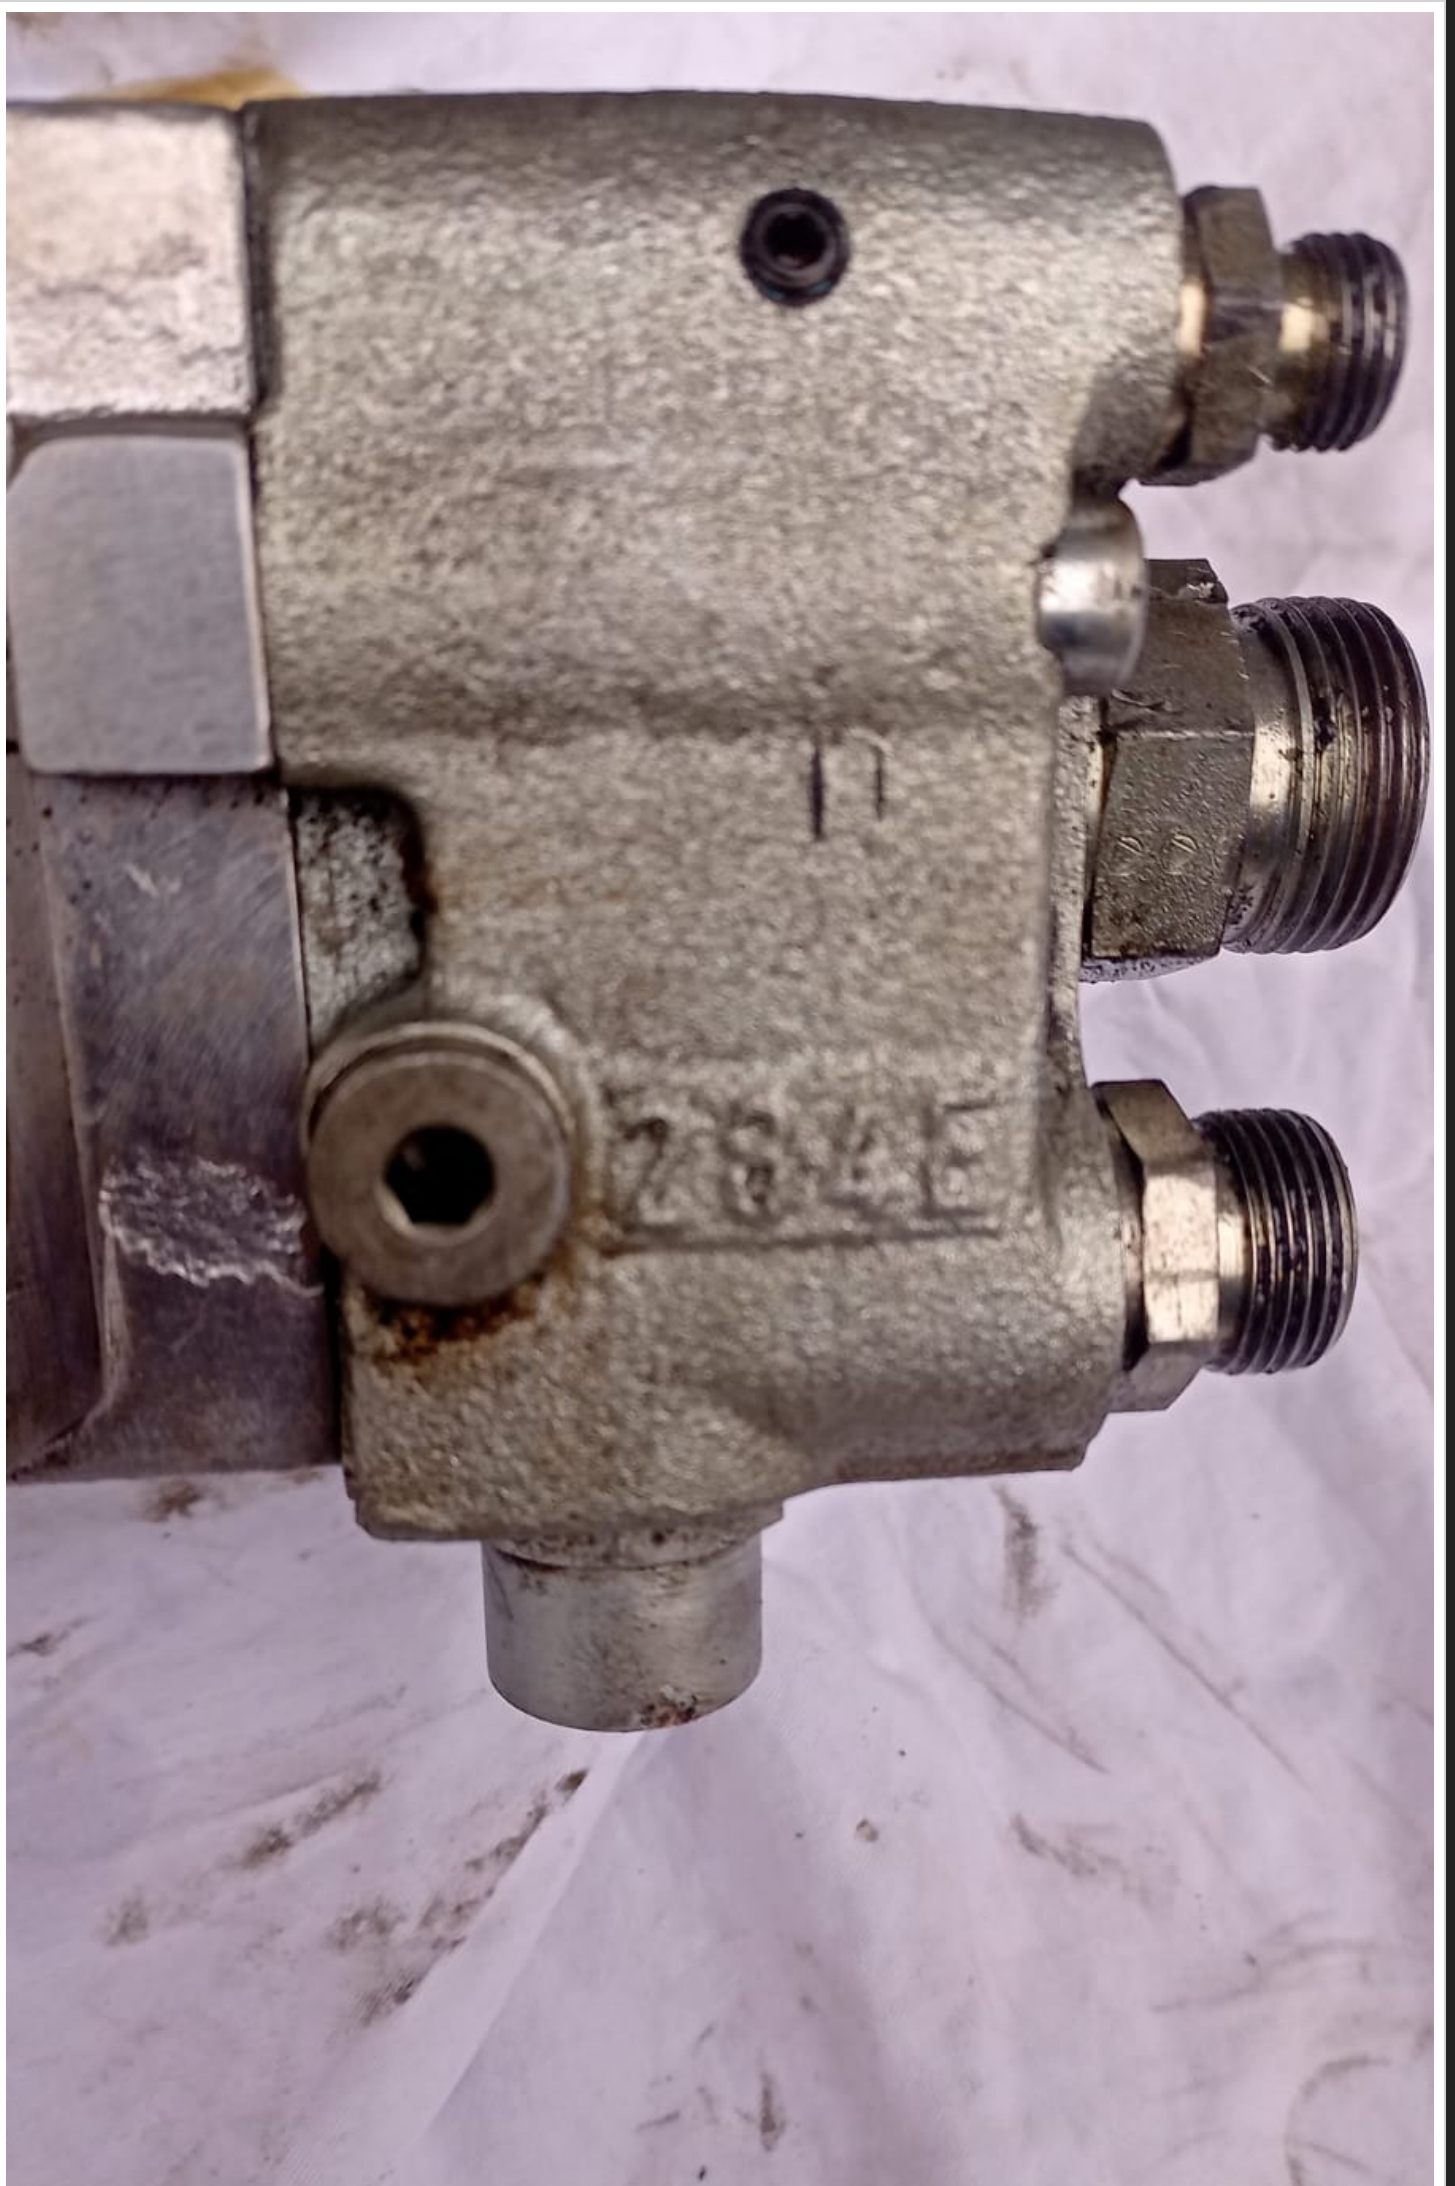



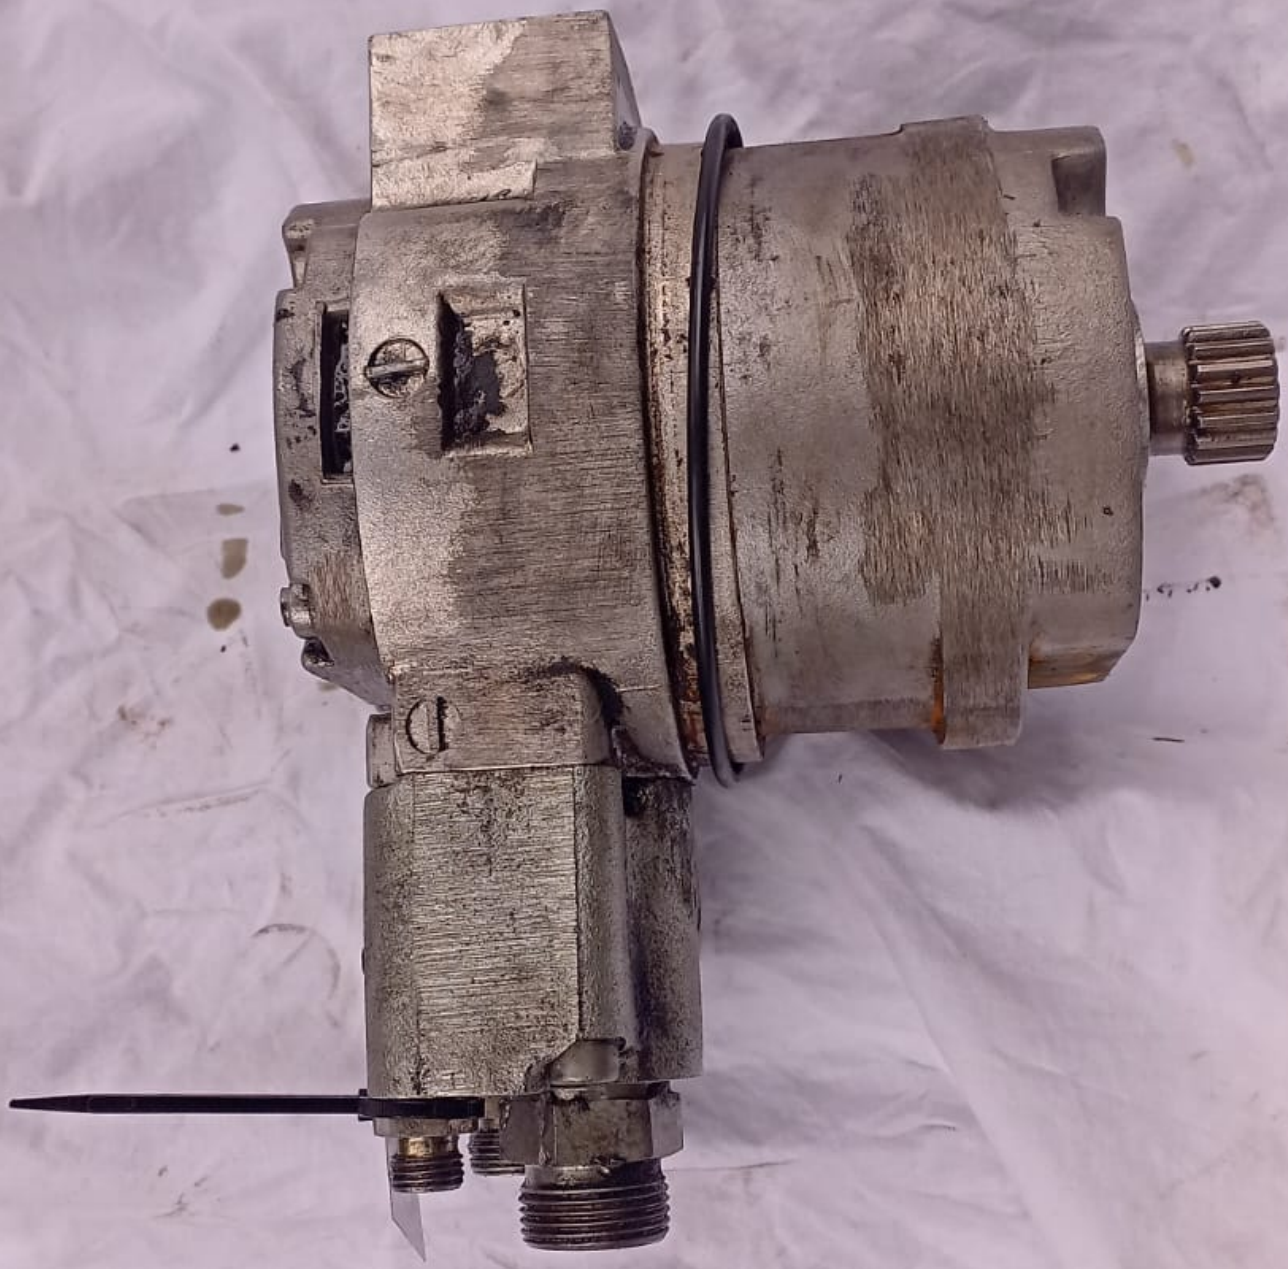








1546

7L 2H
862


1570

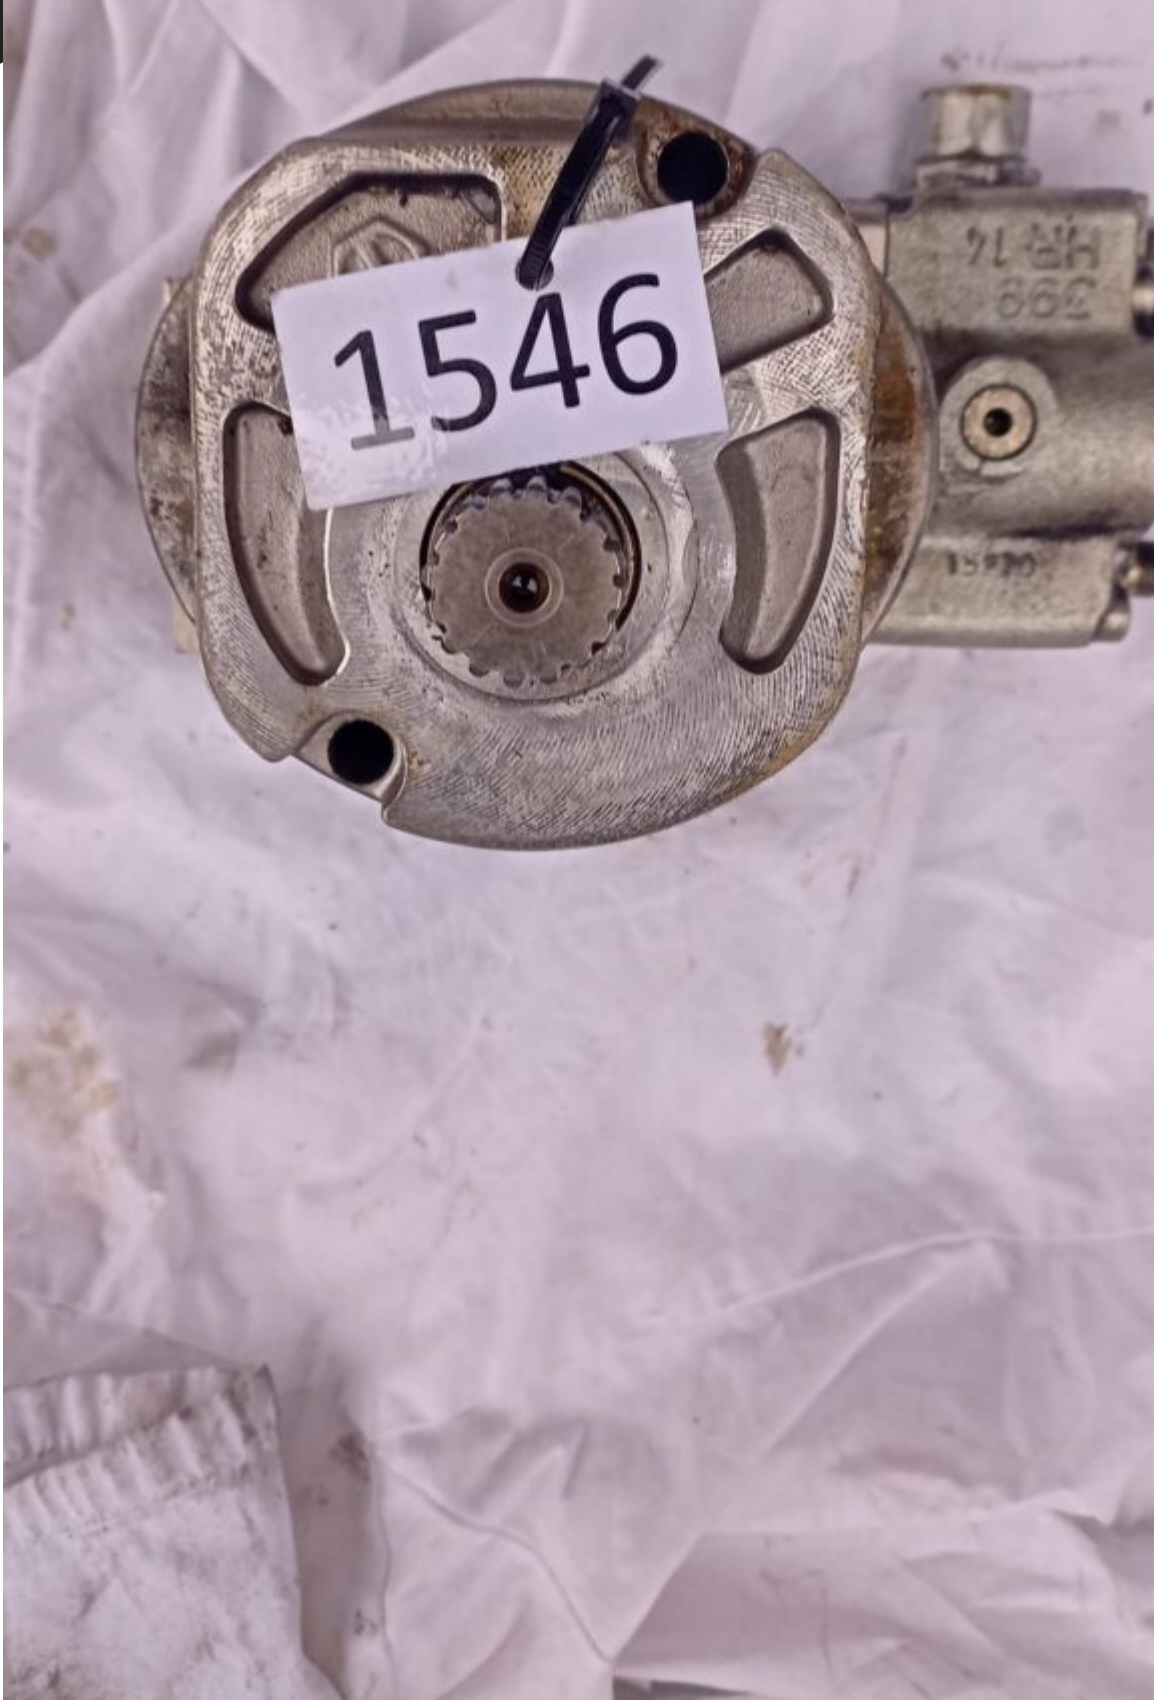

SPECIFICATIONS

Type of pump	gearpump
Number of elements	2
Type of flange	other
Diameter of flange mounting holes D1 (mm)	10.3
Total length of pump L1 (mm)	188
Neck diameter D2 (mm)	40
Type of shaft	type D
Distance from flange to end L2 (mm)	30.5
Diameter of shaft D3 (mm)	27
Number of splines	16
Direction of rotation	clockwise
Position of suction port 1st element, only for pump type T P05-C01	side

Type of connections suction port 1st element, only for pump type T TY-C0a	type C
Thread type of connections suction 1st element	M10
Center distance between mounting holes C-C01a (mm)	30.2
Center distance between mounting holes C-C02a (mm)	58.7
Flow control valve present	YES
Biggest Thread type valve TA3	M27
Second Thread type valve TA4	M18
Material of the housing	aluminium

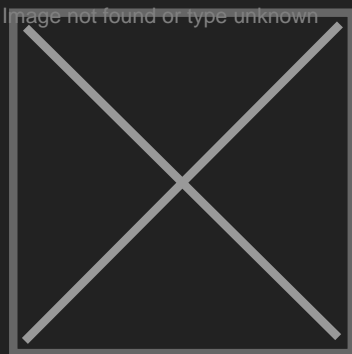

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: office@stivuitoare-lize.ro

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania