

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: office@stivuitoare-lize.ro

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania

Radiator/ventilator clima electric stivuitor Linde (1552)

— SPECIFICATIONS —

Sort of fan	axial fan
Shape of the fan	round with flat sides
Length L1 (mm)	202
Width W1 (mm)	51.1
Diameter D1 (mm)	209
Type of voltage	direct current
Rated voltage U1 (V)	12
Highest voltage U3 (V)	13
Current (A)	6.9
Air flow direction	clockwise
Air flow (Cfm)	431
Air flow (m ³ /h)	730
Length of the wire L2 (mm)	350

Plug present	YES
Number of plugs	1
Number of contacts	2
Wire signal	without
Number of mounting holes	12
Smallest center distance of mounting holes C1 (mm)	150.6
Biggest center distance of mounting holes C2 (mm)	150.6
Material	plastic
Type of bearing	bearing
Fan guard	NO
Number of speeds	1

QUALITY CONTROL
05 / 03
OK

 **SPAL** ITALY
Type VA14-AP11/C-34A 12V
→ ROTATION






Radiato



SPECIFICATIONS

Sort of fan	axial fan
Shape of the fan	round with flat sides
Length L1 (mm)	202
Width W1 (mm)	51.1
Diameter D1 (mm)	209
Type of voltage	direct current
Rated voltage U1 (V)	12
Highest voltage U3 (V)	13
Current (A)	6.9
Air flow direction	clockwise
Air flow (Cfm)	431
Air flow (m ³ /h)	730
Length of the wire L2 (mm)	350

Plug present	YES
Number of plugs	1
Number of contacts	2
Wire signal	without
Number of mounting holes	12
Smallest center distance of mounting holes C1 (mm)	150.6
Biggest center distance of mounting holes C2 (mm)	150.6
Material	plastic
Type of bearing	bearing
Fan guard	NO
Number of speeds	1

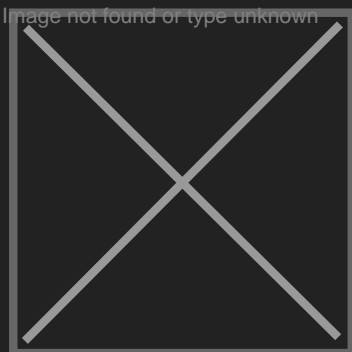

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: office@stivuitoare-lize.ro

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania