



SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: office@stivuitoare-lize.ro

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania


Servo motor ISKRA cu pompa 24V 2.2kw, 120Ah (1580)

Iskra AMJ 5772

11 216.479

2,2kW 24V 120A 6,0Nm

2600min⁻¹



S2=2,0min


S3=5%ED

IP 54

insulation
class

F

CE

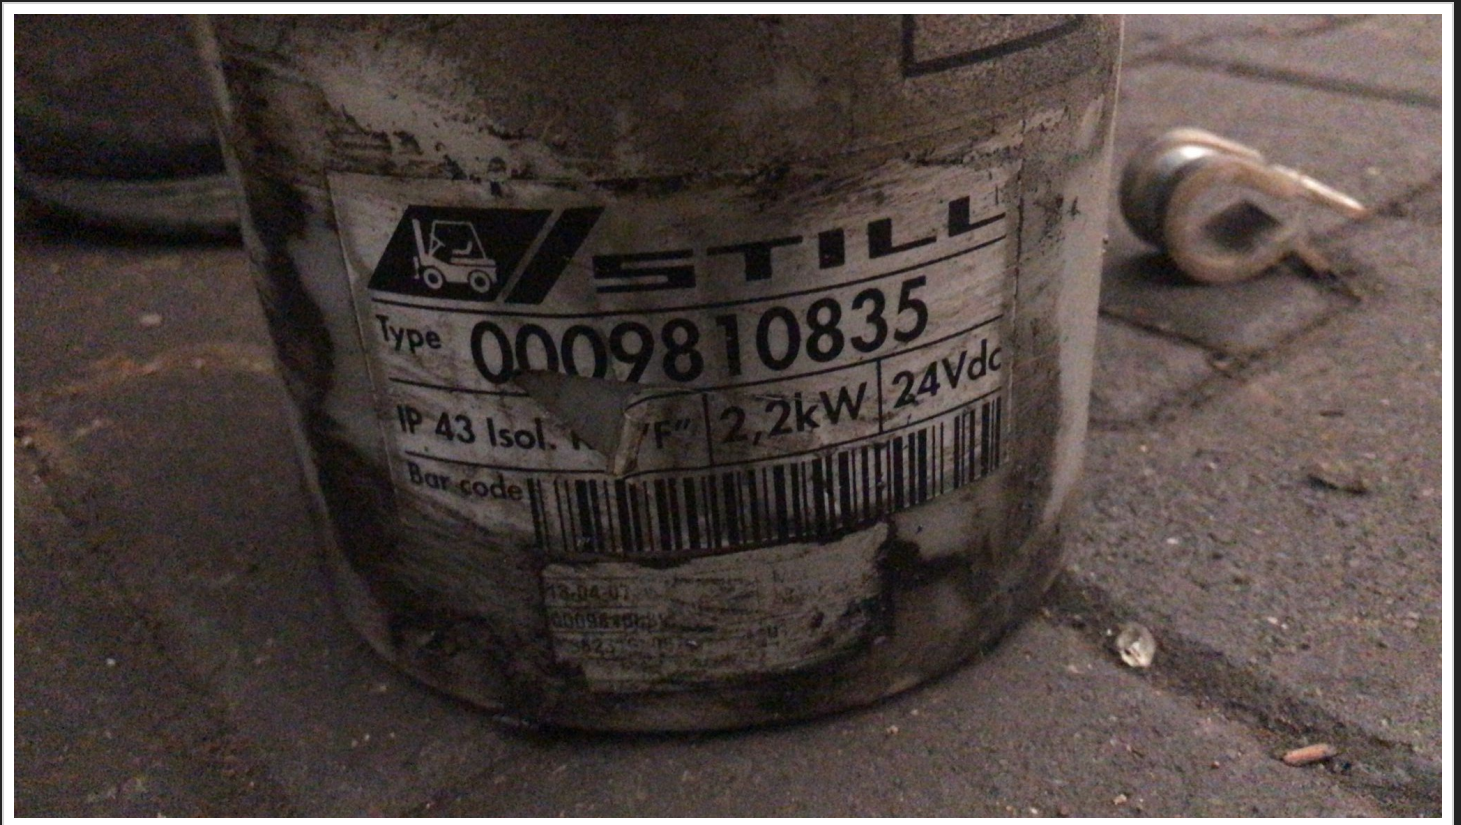

 **STILL**

Type **0009810835**

IP 43 Isol. N. 1F 2,2kW 24Vdc

Bar code 

18-04-07

0009810835

625



Iskra AMJ 5772
11.216.479
2,2kW 24V 120A 6,0Nm
2600min⁻¹ →
S2=2,0min S3=5%ED
IP 54 F CE

1580

0835
2,2kW 24V

SPECIFICATIONS

Type of pump group TY-PG	motor-pump-reservoir	Continuous operation	NO
Length L1 (mm)	346	Brief operation (min)	2
Width B1 (mm)	181	Intermittent operation (%)	5
Height H1 (mm)	175	Starter relay present	NO
Function	lifting	Direction of rotation hydraulic pump	counterclockwise
AC / DC	direct current	Length L2 (mm)	142
Minimum voltage U1 (V)	24	Diameter reservoir D5 (mm)	126
Current I (A)	120	Position	vertical
Revolutions per minute (tr/min)	2600	Decompression	electrical
Power (kW)	2.2	Tension of the valve U4 (V)	24
Cooling fan present	NO	Type of cilinder TY-Cl	single acting (one gate)
Direction of rotation motor	clockwise	Lowering choke proportional with pump	NO

Servo motor ISKRA cu pompa 24V 2.2kw, 120Ah Cod intern 1580 Cod motor: Iskra 11216479 Cod pompa: Still 9810835 Se emite factura Pret: 1000 € fara TVA

SPECIFICATIONS

Type of pump group TY-PG	motor-pump-reservoir	Continuous operation	NO
Length L1 (mm)	346	Brief operation (min)	2
Width B1 (mm)	181	Intermittent operation (%)	5
Height H1 (mm)	175	Starter relay present	NO
Function	lifting	Direction of rotation hydraulic pump	counterclockwise
AC / DC	direct current	Length L2 (mm)	142
Minimum voltage U1 (V)	24	Diameter reservoir D5 (mm)	126
Current I (A)	120	Position	vertical
Revolutions per minute (tr/min)	2600	Decompression	electrical
Power (kW)	2.2	Tension of the valve U4 (V)	24
Cooling fan present	NO	Type of cilinder TY-CI	single acting (one gate)
Direction of rotation motor	clockwise	Lowering choke proportional with pump	NO



Iskra AMJ 5772

11 216.479

2,2kW 24V 120A 6,0Nm

2600min⁻¹



S2=2,0min

S3=5%ED


IP 54

insulation
class

F

CE



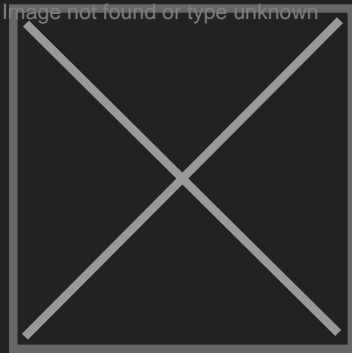

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: office@stivuitoare-lize.ro

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania