



SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: [office@stivuitoare-lize.ro](mailto:office@stivuitoare-lize.ro)

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania

## **Pompa hidraulica stivuitor Bosch SN: 0510615037 (1620)**

---









## — SPECIFICATIONS

Type of pump	gearpump
Number of elements	1
Type of flange	type E
Diameter of flange mounting holes D1 (mm)	11
Center distance of mounting holes flange C1 (mm)	60
Center distance of mounting holes flange C2 (mm)	60
Total length of pump L1 (mm)	113
Neck diameter D2 (mm)	52
Type of shaft	type B
Diameter of shaft D3 (mm)	17
Key (way) width W (mm)	8
Direction of rotation	clockwise
Position of suction port 1st element, only for pump type T POS-C01	side

Type of connections suction port 1st element, only for pump type T TY-C0a	type A
Thread type of connections suction 1st element	M6
Center distance between mounting holes C-C01a (mm)	40
Position of pressure 1st element, only for pump type T POS-C02	side
Type of connections pressure 1st element, only for pump type T TY-C0b	type A
Thread type of connection pressure port 1st element TA-C0b	M6
Center distance between mounting holes C-C01b (mm)	35
Flow control valve present	NO
Material of the housing	aluminium


— SPECIFICATIONS

Pc


Type of pump	gearpump
Number of elements	1
Type of flange	type E
Diameter of flange mounting holes D1 (mm)	11
Center distance of mounting holes flange C1 (mm)	60
Center distance of mounting holes flange C2 (mm)	60
Total length of pump L1 (mm)	113
Neck diameter D2 (mm)	52
Type of shaft	type B
Diameter of shaft D3 (mm)	17
Key (way) width W (mm)	8
Direction of rotation	clockwise
Position of suction port 1st element, only for pump type T P05-C01	side

Type of connections suction port 1st element, only for pump type T TY-C0a	type A
Thread type of connections suction 1st element	M6
Center distance between mounting holes C-C01a (mm)	40
Position of pressure 1st element, only for pump type T P05-C02	side
Type of connections pressure 1st element, only for pump type T TY-C0b	type A
Thread type of connection pressure port 1st element TA-C0b	M6
Center distance between mounting holes C-C01b (mm)	35
Flow control valve present	NO
Material of the housing	aluminium

3 TVA

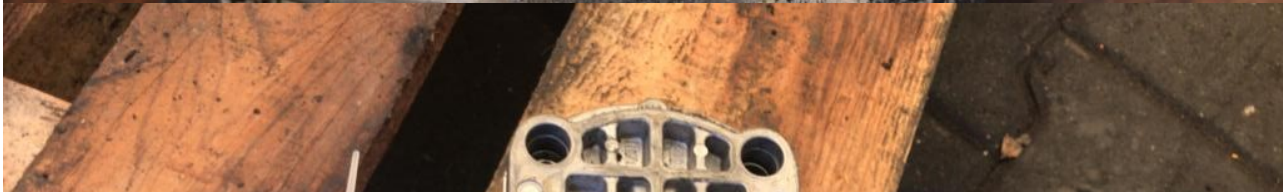



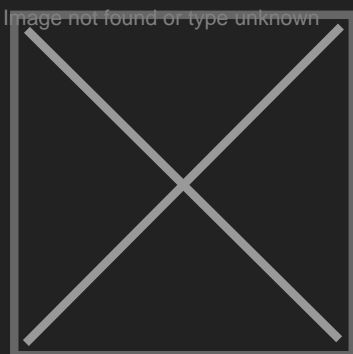

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: [office@stivuitoare-lize.ro](mailto:office@stivuitoare-lize.ro)

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania