



SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: [office@stivuitoare-lize.ro](mailto:office@stivuitoare-lize.ro)

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania

**Ventilator electric stivuator SIROCO/2221332 (1821)**

---

# SIROCO

www.siroco-hvac.com

CE



**CHAUFFAGE RXZ d12 2C 12V 3V**

**Ref: 01000015/62910161**

**N°2100022723**

**Fab. 202103**

**WARNING :** this label ensures the ~~guarantee~~ of your product.  
We decline all responsibility in the event of a jammed motor.  
**SAFETY :** Electric supply must be protected using an appropriate fuse.

Ventilation Fuse

12V : 10A

Panel control connector / Battery connector

Red : + High speed / Brown : + 12V

Orange : + Medium speed / Black : Minus pole

Yellow : + Low speed

Brown : + 12V



**FAZ**  
ELEKTRIK

**SIROCO**

REF: 0222 1332

E13

10R-05 13874 SOFS1

11811783

12V DC 09/21

Moyenne Vitesse: Orange  
Medium Speed: Orange

+

Grande Vitesse: Rouge  
High Speed: Red


+

Petite Vitesse: Jaune  
Low Speed: Yellow

+

Moins 12V: Noir/Black  
Minus 24V: Bleu/Blue


-










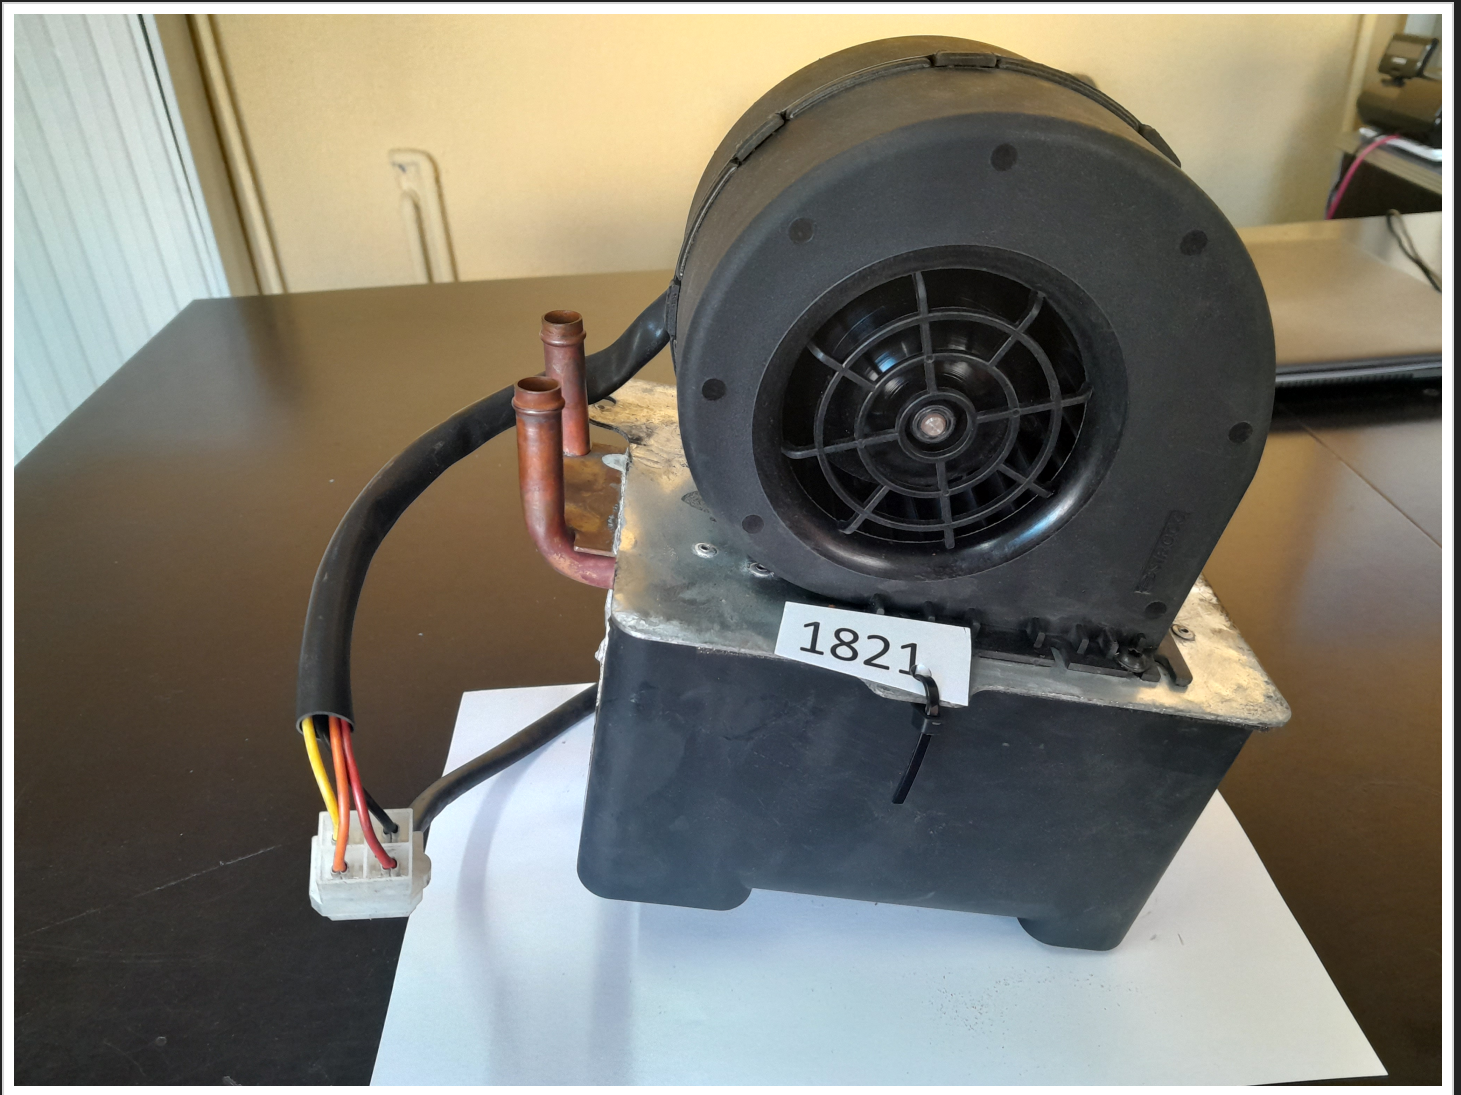

1821

Ventilator electric stivuitor SIROCO/2221332 (1821) Pret: 380€ fara TVA Se emite factura

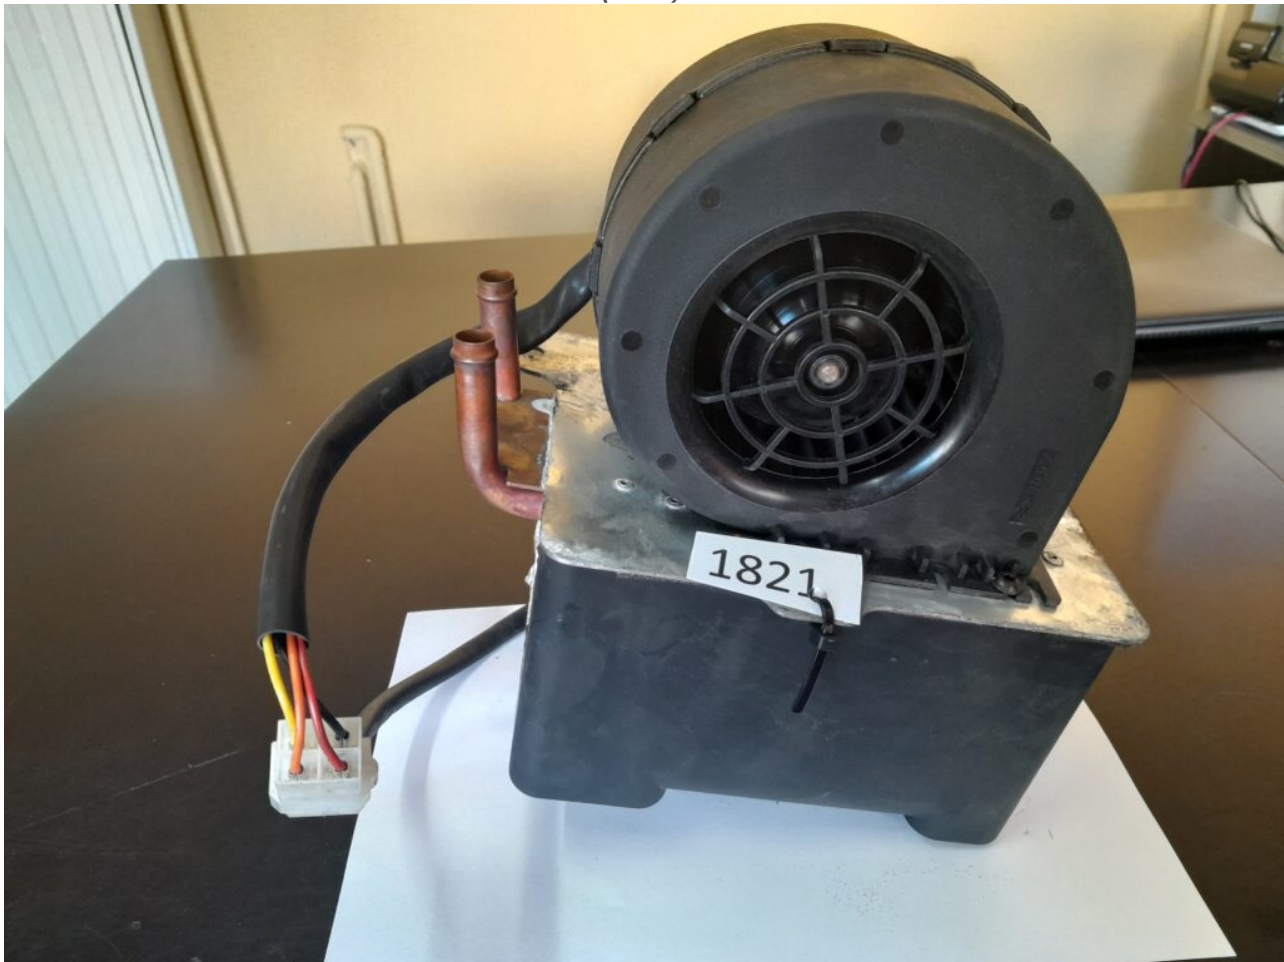



# SIROCO

www.siroco-fvac.com

CE



CHAUFFAGE RXZ d12 2C 12V 3V

Ref: 01000015/62910161

N°2100022723

Feb. 202103

**WARNING** : this label ensures the *quality* of your product.

We decline all responsibility in the event of a *damaged rotor*.

**SAFETY** : Electric supply must be protected using an appropriate fuse.

Ventilation Fuse

12V : 10A

Panel control connector / Battery connector

Red : + High speed / Brown : + 12V

Orange : + Medium speed / Black : Minus pole

Yellow : + Low speed

Brown : + 12V

## SPECIFICATIONS

Sort of fan	centrifugal single blower	Number of wires	4
Shape of the fan	blower shape	Length of the wire L2 (mm)	410
Length L1 (mm)	128	Plug present	YES
Height H1 (mm)	156	Number of plugs	1
Width W1 (mm)	137	Number of contacts	4
Type of voltage	direct current	Wire signal	without
Lowest voltage U2 (V)	12	Smallest center distance of mounting holes C1 (mm)	74.5
Highest voltage U3 (V)	13	Biggest center distance of mounting holes C2 (mm)	118.5
Current (A)	15	Material	plastic
Power P1 (W)	147	Fan guard	NO
Revolutions/minute (tr/min)	3350	Number of speeds	3
Air flow direction	blowing		
Air flow (m <sup>3</sup> /h)	400		



SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: [office@stivuitoare-lize.ro](mailto:office@stivuitoare-lize.ro)

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania