

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: [office@stivuitoare-lize.ro](mailto:office@stivuitoare-lize.ro)

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania

## Jante 5.00-12 stivuior-motostivuior si electrostivuior 2078







51443265  
ET+49

5.00S-12

132323232323232323  
M 111111111111111111







SOLID IDEAL  
5232DS556

5.0093-12

5145265  
ET+49

2018

33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3

Jante 5.00-12 stivuiitor-motostivuiitor si electrostivuiitor Cod intern 2078 Pret: 150€ fara TVA/bucata  
Se emite factura












| Rim width | Rim diameter | Tyre size | Centre hole | Pitch circle | Number of holes | Diameter of stud holes | Flange position | Used for               |
|-----------|--------------|-----------|-------------|--------------|-----------------|------------------------|-----------------|------------------------|
| B1        | D1           |           | D2<br>mm    | c<br>mm      | G               | mm                     |                 |                        |
| 2.50      | 4            | 4.00-4    | 52          | 68           | 5               | 8,0                    | Half            | Komatsu – Pimespo – OM |
| 3.00      | 8            | 4.00-8    | 85          | 130          | 5               | 19,0                   | Half            | Clark                  |
|           |              | 5.00-8    | 110         | 140          | 5               | 18,5                   | Half            | Hyster                 |
|           |              | 125/75-8  | 86          | 114          | 6               | 15,0                   | Half            | Toyota                 |
|           |              | 15x4.5-8  | 100         | 125          | 6               | 16,0                   | Half            | Various                |
|           |              |           | 110         | 148          | 6               | 15,0                   | Half            | Various                |
| 4.33      | 8            | 16x6-8    | 95          | 135          | 5               | 17,5                   | 124             | Various                |
|           |              | 150/75-8  | 110         | 145          | 5               | 18,5                   | Half            | Hyster                 |
|           |              | 18x7-8    | 110         | 147          | 5               | 17,5                   | 122             | Various                |
|           |              | 180/70-8  | 90          | 130          | 6               | 17,5                   | 89              | Various                |
|           |              |           | 96          | 136          | 6               | 17,5                   | 121             | TCM                    |
|           |              |           | 100         | 140          | 6               | 17,5                   | 50              | Komatsu                |
|           |              |           | 105         | 142          | 6               | 18,0                   | Half            | Toyota                 |
| 4.00      | 9            | 6.00-9    | 124         | 165          | 5               | 17,0                   | Half            | Yale – Hyster          |
|           |              | 140/55-9  | 140         | 170          | 6               | 18,0                   | Half            | Various                |
|           |              |           | 150         | 180          | 6               | 18,0                   | Half            | Various                |
|           |              |           | 130         | 160          | 8               | 16,5                   | Half            | Various                |
|           |              |           | 142         | 170          | 8               | 16,0                   | Half            | Various                |
| 5.00      | 10           | 6.50-10   | 127         | 165          | 5               | 16,0                   | Half            | Yale – Hyster          |
|           |              | 7.50-10   | 140         | 170          | 6               | 18,0                   | Half            | Various                |
|           |              |           | 150         | 180          | 6               | 18,0                   | Half            | Daewoo                 |
|           |              |           | 150         | 180          | 6               | 18,0                   | Half            | Various                |
|           |              |           | 170         | 200          | 6               | 17,0                   | Half            | Caterpillar            |
|           |              |           | 130         | 160          | 8               | 17,0                   | Half            | TCM                    |
|           |              |           | 142         | 170          | 8               | 16,0                   | Half            | Various                |
|           |              |           | 105         | 140          | 10              | 18,5                   | Half            | Hyster                 |
| 5.00      | 12           | 7.00-12   | 149,3       | 203,2        | 5               | 32,0                   | Half            | Yale – Hyster          |
|           |              |           | 175         | 220          | 5               | 27,0                   | Half            | Various                |
|           |              |           | 150         | 200          | 6               | 27,0                   | Half            | Various                |
|           |              |           | 166         | 218          | 6               | 32,0                   | Half            | Yale – Hyster          |
|           |              |           | 170         | 220          | 6               | 27,0                   | Half            | Various                |
|           |              |           | 170         | 220          | 6               | 32,0                   | Half            | Various                |
|           |              |           | 145         | 190          | 8               | 26,0                   | Half            | Toyota                 |

| Rim width | Rim diameter | Tyre sizes |            |           |           |
|-----------|--------------|------------|------------|-----------|-----------|
| B1        | D1           |            |            |           |           |
| 3.00      | 8            | 4.00-8     | 5.00-8     | 125/75-8  | 15x4.5-8  |
| 3.25      | 8            | 4.00-8     | 5.00-8     | 15x4.5-8  |           |
| 3.75      | 8            | 4.00-8     | 5.00-8     |           |           |
| 4.33      | 8            | 16x6-8     | 150/75-8   | 18x7-8    | 180/70-8  |
| 7.00      | 8            | 18x9-8     |            |           |           |
| 4.00      | 9            | 6.00-9     | 140/55-9   |           |           |
| 6.00      | 9            | 21x8-9     | 200/75-9   |           |           |
| 5.00      | 10           | 6.50-10    | 7.50-10    | 180/60-10 |           |
| 6.50      | 10           | 23x9-10    | 225/75-10  | 200/50-10 |           |
| 3.00      | 12           | 4.50-12    |            |           |           |
| 5.00      | 12           | 7.00-12    | 5.70-12    |           |           |
| 8.00      | 12           | 27x10-12   | 23x10-12   |           |           |
| 3.75      | 13           | 25x6       | 23x5       |           |           |
| 4.50      | 15           | 5.50-15    | 6.00-15    |           |           |
| 5.50      | 15           | 7.00-15    |            |           |           |
| 6.00      | 15           | 7.50-15    | 7.00-15    |           |           |
| 6.50      | 15           | 200-15     | 7.50-15    | 8.25-15   |           |
| 7.00      | 15           | 250-15     | 28x9-15    | 8.15-15   | 225/75-15 |
| 7.50      | 15           | 250-15     | 10.00-15   |           |           |
| 8.00      | 15           | 300-15     |            |           |           |
| 9.75      | 15           | 355/65-15  | 28x12.5-15 | 355/45-15 |           |
| 6.00      | 16           | 7.50-16    |            |           |           |
| 6.50      | 20           | 8.25-20    | 9.00-20    |           |           |
| 7.00      | 20           | 9.00-20    | 10.00-20   |           |           |
| 7.50      | 20           | 10.00-20   | 11.00-20   |           |           |
| 8.00      | 20           | 10.00-20   | 11.00-20   | 12.00-20  |           |
| 8.50      | 20           | 12.00-20   |            |           |           |
| 10.00     | 20           | 12.00-20   |            |           |           |
| 8.50      | 24           | 12.00-24   |            |           |           |
| 10.00     | 24           | 14.00-24   |            |           |           |

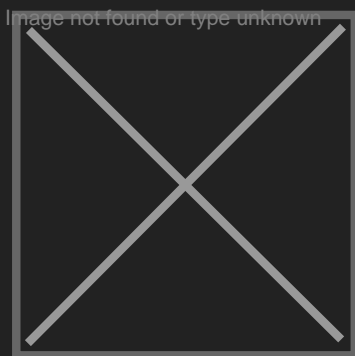

SC Stivuitoare-Lize SRL

Telefon: 0040 744 136 717

Email: office@stivuitoare-lize.ro

Website: <http://stivuitoare-lize.ro/>

Comuna Corunca, Str. Principala, nr. 412-413, judet Mures, Romania